


AUTO-Choice Range

AUTO-Full®

Made in ITALY, designed for intensive use.

AUTO-Full® is designed for internal and external applications, self-repairing and suitable for every kind of industrial application.

AUTO-Full® is useful for managing people and vehicles passages between different units in the factories, dividing two different environments. Each door is home tested through internal procedures.

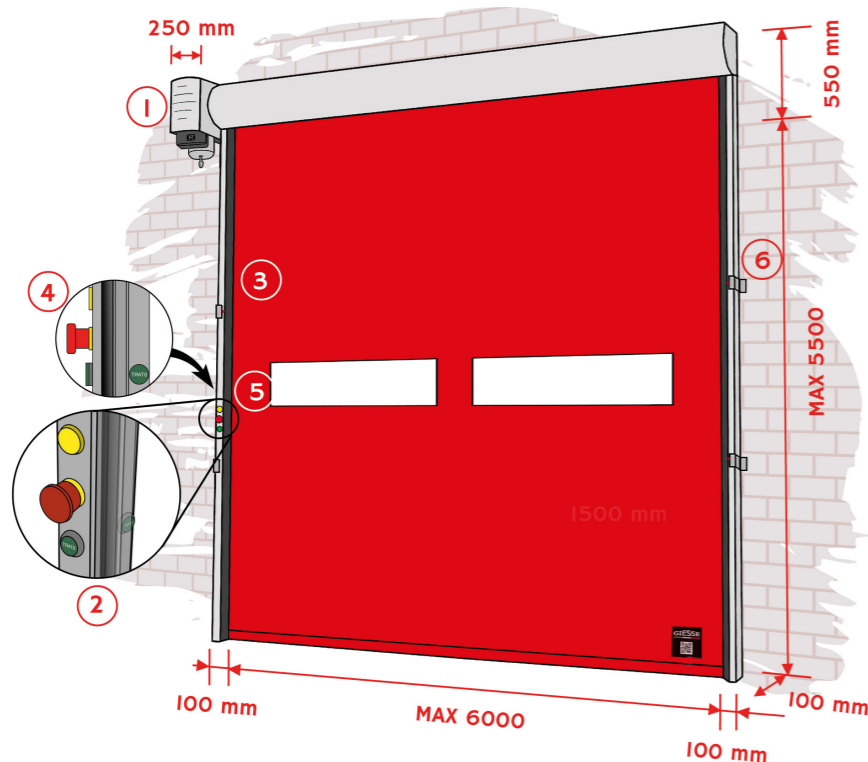

1. Integrated control panel 230 V
2. Start / stop push button on board
3. Light curtain
4. Start push button opposite side
5. Led flashing blinker
6. Brackets

ENERGY
Automatic Door
X10000097

Manufacturer: GIESSE S.R.L.
Model: SPIN&AUTO
Reference: 6.0x5.5 Mt. max.

Classification acc. Traff. Class

A	12
B	12
C	12
D	12
E	12
F	12

Application: Industrial
Climate Class: C1a Size Class: S5

Door Type High Speed Flexible	U-Value 7,52 (W/m²K)	Air Permeability 12 (perh·m³)
Mean Cycle Speed 0,73 (h⁻¹)	Operating Power 1500 (W)	Stand-by Power 10 (W)

Classification is made under CE marking specifications. This is a voluntary label provided as a customer service to allow consumers to make informed decisions on the energy performance of competing products.

CE
0497

GIESSE
LOGISTICA INDUSTRIALE

Loc. Pautasso, 3 - Castellinaldo (CN)
ITALIA
Tel. +39 (0) 173 658377
www.giesselogistica.com

12
type n. and DoP n.
XXXXXXXXXXXXXX

Type: AUTO FULL
Year: 2020
EN 13241:2003+A2:2016
UE N. 305/2011-2006/42/CE

Motorized door for
internal / external application
Power supply:
230 V
Power (Max): 1,5 Kw
Wind load resistance:
CLASS 2


AUTO-Full®

Customizable curtain with a silk-screen painting or digital printing.
Manageable from PLC.




SPECIFICATION	STANDARD FEATURES
Operator	Frontal or lateral (inverter)
Max clear passage	W 6000 x H 5500 mm
Upper beam size	350 x 350 mm
Rails	Self-supporting, electrical conduits included
Zipper	High density polietilen profile
Opening controls	Start / stop push button on board, led flashing blinker
Curtain	PVC 1200 gr/sqm
Curtain reinsert	Self-repairing
Windows	1 row 1000 x 300 mm each
Safety	Light curtains
Speed	1.2 m/s
Installation	Inside / outside
Wind resistance	Class 2

Frame: Materials and colours

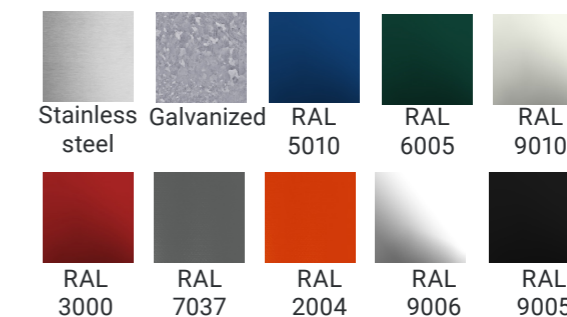

PVC suggested colours

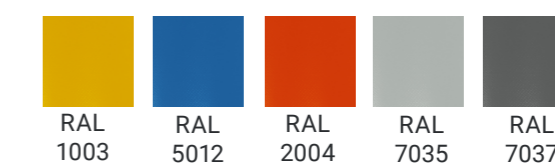

PVC available colours

