

FOLD-OPTION

FOLD-Up®


Made in ITALY, designed for external use.

The FOLD-Up® doors represent the innovation in folding doors, the solution that meets the needs of strength and practicality.

The FOLD-Up® folding speed doors, 100% reliable and long-lasting, can also be placed outside the buildings, ensuring suitable airtightness through the seals, applied on the vertical side rails.

These doors have been developed by the regulation of fast and continuous industrial flows.

All electrical and electronic devices undergo a strict internal procedure of quality control.

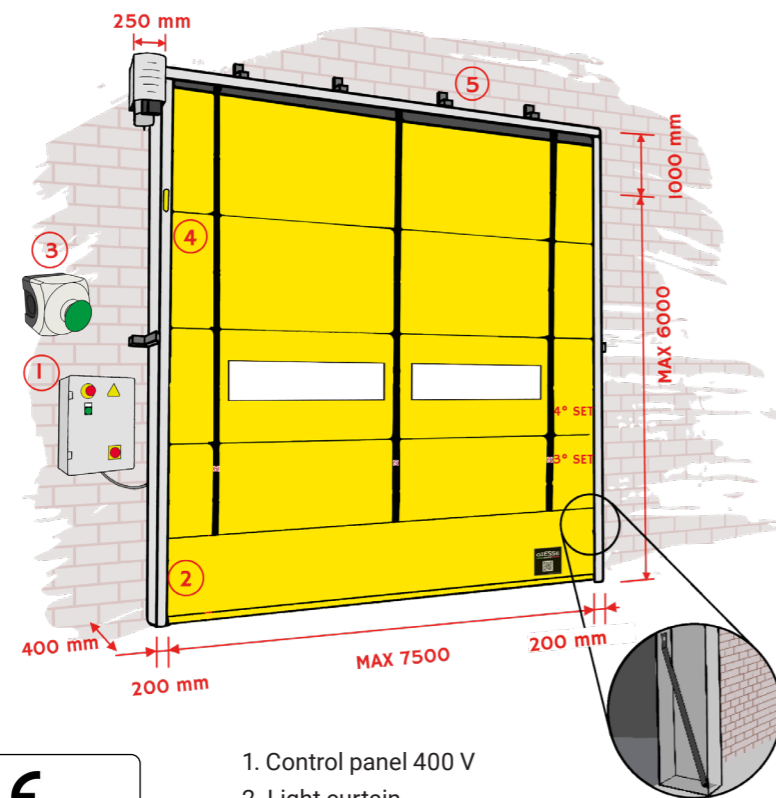

1. Control panel 400 V
2. Light curtain
3. Start push button opposite side
4. Led flashing blinker
5. Brackets

CE
0497

GIESSE
Loc. Pautasso, 3 - Castellinaldo (CN)
ITALIA
Tel. +39(0) 173 658377
www.giesselogistica.com
12
type n. and DoP n.
XXXXXXXXXXXXXXXXXX

Type: FOLD UP
Year: 2020
EN 13241:2003+A2:2016
UE N. 305/2011-2006/42/CE
Motorized door for internal / external application
Power supply: 400 V
Power (Max): 2,2 Kw
Wind load resistance CLASS2

ENERGY
Automatic Door
X10000095

Manufacturer: GIESSE S.R.L.
Model: FOLD UP
Reference: 7.5x6.0 Mt. max.

Classification acc. Traffic Class: A, B, C, D, E, F

Application: Industrial
Climate Class: C1a Size Class: S5

Door Type High Speed Flexible	U-Value 6,34 (W/m²K)	Air Permeability 12 (m³/m²/h)
Mean Cycle Speed 0,57 (min)	Operating Power 1500 (W)	Stand-by Power 10 (W)

Classification is made under I.S.O. specifications. This is a voluntary label provided as a customer service to allow consumers to make informed decisions on the energy performance of competing products.


FOLD-Up®

Customizable curtain with a silk-screen painting or digital printing.
Manageable from PLC.


SPECIFICATION	STANDARD FEATURES
Operator	Frontal or lateral
Max clear passage	W 7500 X H 6000 mm
Upper beam size	400 X 200 mm
Rail	Self-supporting frame, electrical conduits included
Opening controls	Start / Stop push button on board, led flashing blinker
Curtain	PVC 1200 gr/sqm
Windows	1 row 1000 x 300 mm each
Safety	Light curtains
Speed	1.2 m/s
Installation	Inside / Outside
Wind resistance	Class 2
Belts	For curtain lifting



Frame: materials and colours

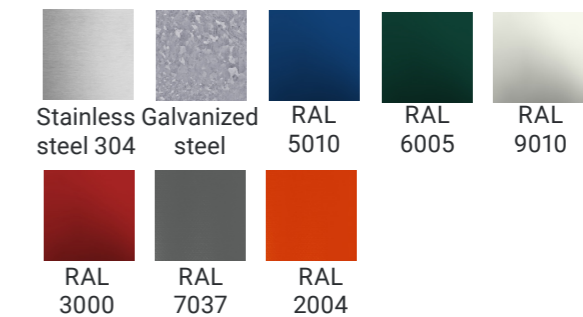

PVC suggested colours similar to:

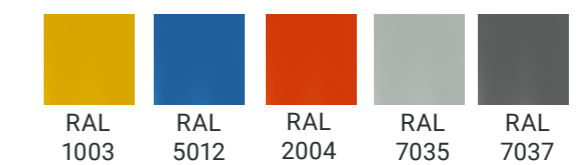

PVC available colours similar to:

